


PARK INDUSTRIAL PRESSURE VESSELS WITH TOP&BOTTOM THREADED OPENINGS

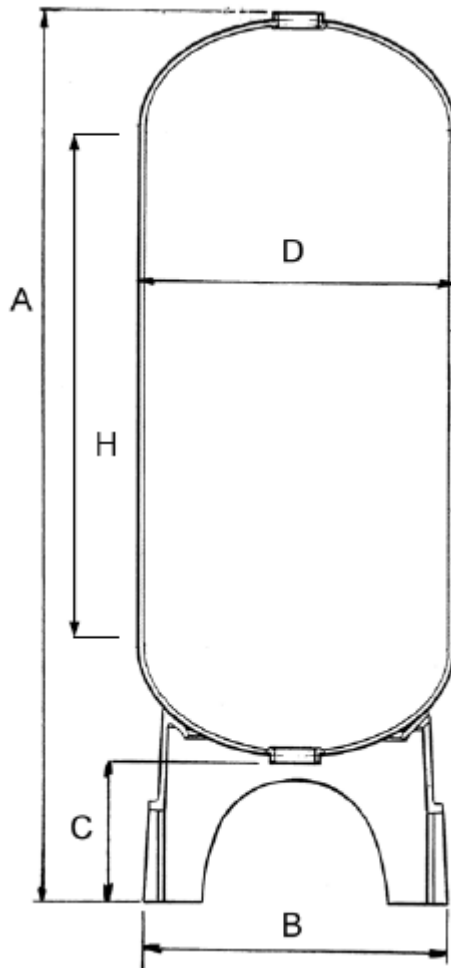

- Made in European Union (Belgium);
- composite pressure vessels PE liner reinforced with fiberglass and epoxy resin;
- for industrial and potable water treatment systems;
- European 97/23/EC Directive compliant for pressure equipment (PED);
- certification for contact with drinking water following EC directives and KTW recommendations;
- D.M. n.174 dated 06/04/2004 compliant about materials suitable for contact with water for human consumption;
- max operating pressure 10 bar;
- max operating temperature 50°C;
- top and bottom threaded connection 4"– 8UN;
- cycle test 250.000 times from 0,7 to 10 bar;
- burst test to 4 times max operating pressure;
- blue colour;

REF.	MODEL	VOLUME (liters)	DIAMETER (mm)	A (mm)	B (mm)	C (mm)	H (mm)	CONNECTION (inch)
B14065HB	14 x 65	140	369	2031 ± 20	488	381	1378	4"
B16065HB	16 x 65	170	406	2031 ± 20	497	384	1371	4"
B18065HB	18 x 65	245	469	2080 ± 20	554	404	1350	4"
B21060HB	21 x 60	310	552	1923 ± 20	554	389	1155	4"
B24069HB	24 x 69	450	610	2169 ± 20	615	422	1327	4"
B30072HB	30 x 72	712	770	2248 ± 30	816	413	1313	4"
B36072HB	36 x 72	1080	927	2305 ± 30	1001	408	1266	4"